

Bezpieczniki typu D gR


500V AC/ 400V DC
od 2 do 200A



Typ: Diazed D II - D V
bardzo szybkie


Wymiary

Rozmiar	a	b \varnothing
D II	50	22
D III	50	27
D IV	57	33



Rozmiar	Prąd	Napięcie	Numer referencyjny	Opakowanie
	A	V AC		
D II	2	500V AC / 400V DC	Z212542E	5
D II	4	500V AC / 400V DC	K213058E	5
D II	6	500V AC / 400V DC	E214065E	5
D II	10	500V AC / 400V DC	M214578E	5
D II	16	500V AC / 400V DC	T215090E	5
D II	20	500V AC / 400V DC	T215596E	5
D II	25	500V AC / 400V DC	B216109E	5
D II	30	500V AC / 400V DC	Y216612E	5
D III	35	500V AC / 400V DC	K217129E	5
D III	50	500V AC / 400V DC	Q217640E	5
D III	63	500V AC / 400V DC	Y218153E	5
D IV	80	500V AC / 400V DC	B201251E	5
D IV	100	500V AC / 400V DC	M201767E	5
D V	125	500V AC / 400V DC	J207054E	5
D V	160	500V AC / 400V DC	C211510E	5
D V	200	500V AC / 400V DC	G212020E	5

Rozmiar	Prąd	Pre-arcing I ² t value	Total I ² t value at 380V (RMS)	Total I ² t value at 500V (RMS)	Utrata mocy	kg / 100 szt.
	A	A ² s	A ² s	A ² s	W	
D II	2	1	2	3	1,8	3,1
	4	2	4	5	3,1	3,1
	6	4	6	9	3,2	3,1
	10	10	14	20	5,0	3,1
	16	26	40	55	5,8	3,1
	20	40	60	85	8,0	3,1
	25	95	140	200	12,2	3,1
D III	35	490	790	1100	14	5,3
	50	900	1480	2050	16	5,3
		1580	2400	3200	19	5,3
D IV	80	3200	5200	7300	35	11,0
	100	5600	10100	14000	41	11,0

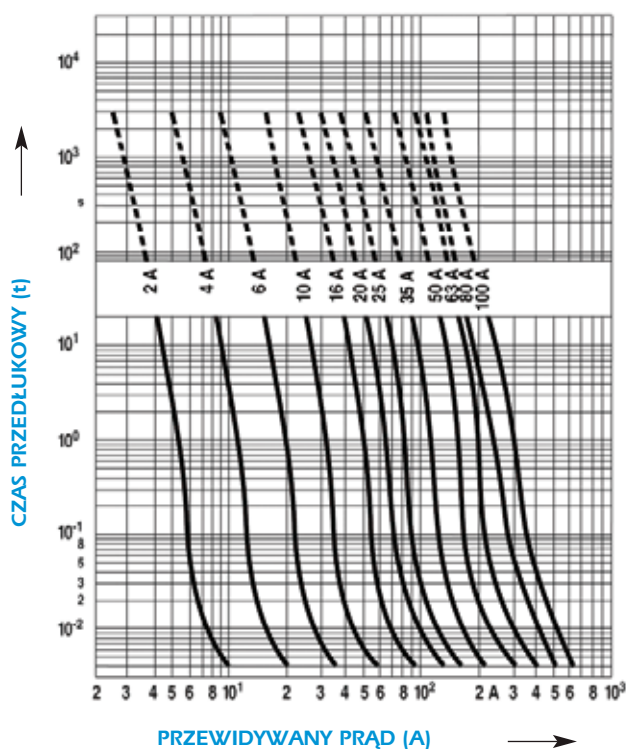

Charakterystyki czasowo - prądowe

