
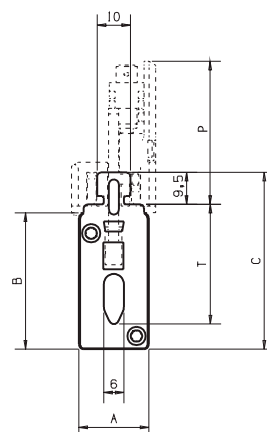


Bezpieczniki NH

690V AC
od 16 do 800A

Typ: NH nożowe gRB
DIN 000 do 3



Rozmiar	Prąd znam. (A)	Numer referencyjny	Waga	Opak.
			g	
000	16	N322035	135	3
	20	Q322037		
	25	S322039		
	32	X322043		
	40	B322047		
	50	F322051		
	63	K322055		
	80	P322059		
	100	T322063		
00	125	W322065	200	3
	20	Z322137		
	25	B322139		
	32	F322143		
	40	K322147		
	50	P322151		
	63	T322155		
	80	Y322159		
	100	C322163		
0	125	E322165	250	3
	160	J322169		
	200	L322171		
	32	P322243		
	40	T322247		
	50	Y322251		
	63	C322255		
	80	G322259		
	100	L322263		
0	125	N322265	250	3
	160	S322269		
	200	V322271		
	250	Z322275		

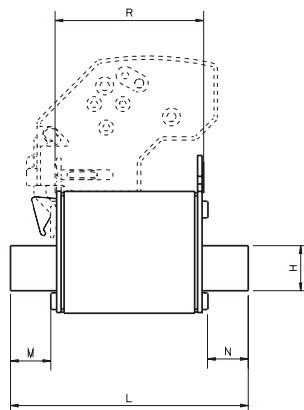

Mikroprzełączniki są dostarczane osobno

Rozmiar	A	B	C	H	L	M	N	P	R	T
000	20,8	40,5	52,5	15	79	13,5	13,5	43,4	49,5	35
00	29,5	47,5	59,5	15	79	13,1	13,1	43,4	50	35
0	29,5	47,5	59,5	15	125	29,1	29,1	43,4	66	35

Rozmiar	Prąd znam. (A)	Numer referencyjny	Waga	Opak.
			g	
1	63	L322355	430	3
	80	J322399		
	100	V322363		
	125	X322365		
	160	B322369		
	200	D322371		
	250	H322375		
	315	M322379		
	350	N322380		
2	160	K322469	600	3
	200	M322471		
	250	R322475		
	315	W322479		
	350	X322480		
	400	A322483		
3	450	C322485	750	3
	500	E322487		
	315	E322579		
	350	F322580		
	400	J322583		
	450	L322585		
	500	N322587		
	560	P322588		
630	Q322589			
3	700	R322590	750	3
	800	S322591		

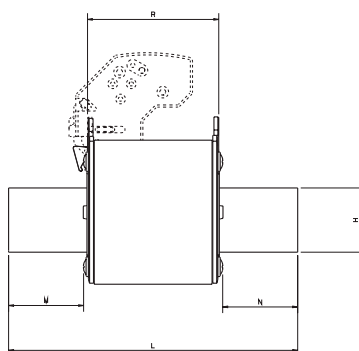


Mikroprzełączniki są dostarczane osobno

Rozmiar	A	B	C	H	L	M	N	P	R	T
1	39,5	52,5	64,5	20	135	32,1	32,1	43,4	68	40
2	51	60	72	26	150	38,85	38,85	43,4	68	48
3	70	74	86	33	150	38,85	38,85	43,4	68	60

Typ: NH nożowe aR (URD) DIN 000 do 3

690V AC
od 16 do 1000A

Wymiary jak na poprzedniej stronie

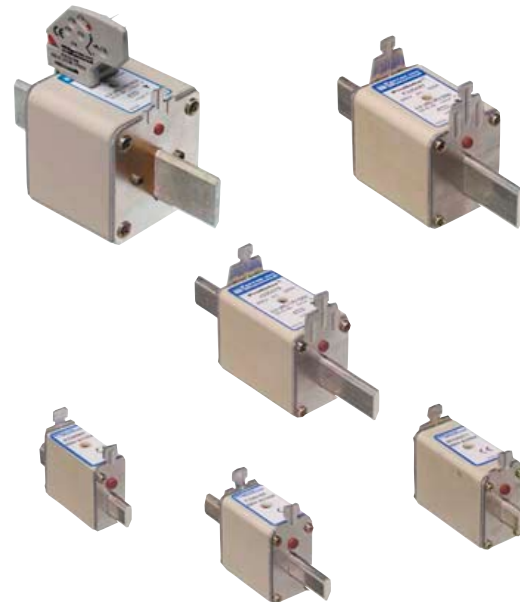

Rozmiar	Prąd znam. (A)	Strata mocy (W) 0,8 I _N	Numer referencyjny	Waga	Opak.
				g	
000	16	1,0	P320035		
	20	1,5	R320037		
	25	2,0	T320039		
	32	2,5	Y320043		
	40	4,0	C320047		
	50	5,0	G320051		
	63	6,0	L320055		
	80	8,0	Q320059		
	100	9,5	V320063	135	3
	125	10,5	X320065		
	160	15,0	B320069		
	200	18,0	D320071		
250	22,0	H320075			
315	30,0	M320079			
00	20	1,5	A320137		
	25	2,0	C320139		
	32	2,5	G320143		
	40	4,0	L320147		
	50	5,0	Q320151		
	63	6,0	V320155		
	80	8,0	Z320159		
	100	8,5	D320163	200	3
	125	10,0	F320165		
	160	14,0	K320169		
	200	17,0	M320171		
	250	20,0	R320175		
315	29,0	W320179			
0	32	9,5	Q320243		
	40	10,0	V320247		
	50	10,5	Z320251		
	63	11,5	D320255		
	80	12,5	H320259		
	100	15,0	M320263		
	125	18,0	P320265	250	3
	160	22,0	T320269		
	200	27,0	W320271		
	250	33,0	A320275		
	315	40,0	E320279		

Rozmiar	Prąd znam. (A)	Strata mocy (W) 0,8 I _N	Numer referencyjny	Waga	Opak.
				g	
1	63	18	M320355		
	80	21,5	K320399		
	100	23,0	W320363		
	125	26,0	Y320365		
	160	29,0	C320369		
	200	33,0	E320371	430	3
	250	37,0	J320375		
	315	42,0	N320379		
	350	44,0	P320380		
	400	48,0	S320383		
	160	38	L320469		
	200	42	N320471		
2	250	46,5	S320475		
	315	54,0	X320479		
	350	58,0	Y320480		
	400	62,5	B320483		
	450	69,0	D320485	600	3
	500	73,0	F320487		
	560	78,0	G320488		
	630	85,0	H320489		
	700	87,0	J320490		
	315	57,0	F320579		
	350	58,0	G320580		
	400	65,5	K320583		
3	450	70,0	M320585		
	500	75,0	P320587		
	560	80,0	Q320588		
	630	89,0	R320589	750	3
	700	100,0	S320590		
	800	112,0	T320591		
	900	125,0	V320592		
	1000	140,0	W320593		

690V AC

Typ: NH nożowe aR rozmiary DIN od 000 do 3

Charakterystyki czasowo - prądowe

